

* Synchronized Control Suitable

< C-1, C-2 & C-3 >

* Three Function Timer Control,

ONE Shot, ON Delay Or OFF Delay


Selectable. < C-2 or C-3 >

* Two Timer Controller, ON + OFF Delay.

< C-3 >

* Low cost Type C-6,

NPN / PNP Input Selectable

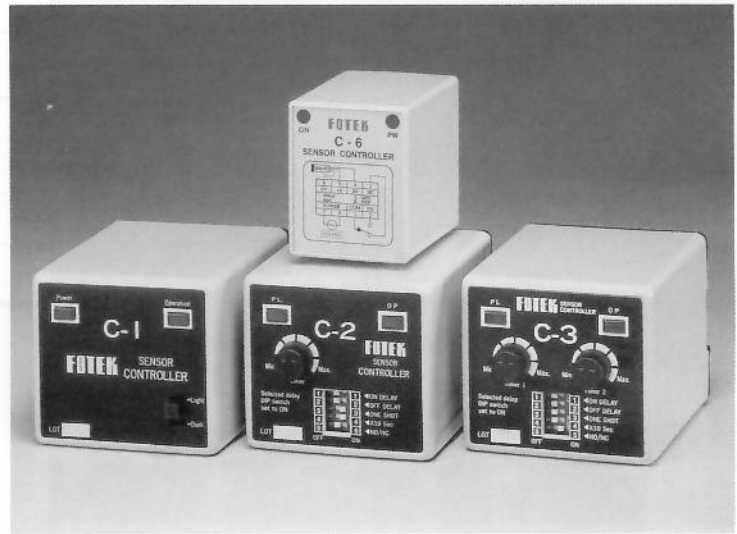

Specification


Model	C - 1	C - 2	C - 3	C - 6
Operating Voltage	110/220 VAC ± 20%, 50/60 Hz			110V or 220VAC
DC Power Output	12VDC, 150mA max.			12 VDC, 40mA max.
Output Control	Non	One Shot ON Delay OFF Delay Time : 0.01s~10s Adjustable	<u>Timer 1</u> ON Delay <u>Timer 2</u> One Shot ON Delay OFF Delay	Non
Output Method	Relay, 5A/250VAC			
Output Status	NO/NC Selectable			
Response Time	15ms	1ms		15ms
Current Consumption	3VA max.			
Operating Temp./Hum.	-20 °C ~ +60 °C ; 35% ~ 85% RH			
Housing Material	Intensive ABS			
Weight	Appr. 310g	Appr. 380g	Appr. 390g	Appr. 135g

★ Timer Range : 0.01S ~ 1.0S or 0.1S ~ 10.0S Selectable

Function of Timer < C-2/C-3 >

Timer	Output Timing Chart T : < Adjustable >	Remarks
Input <Hi → Lo>		t : Delay Time
Non Delay Output		Range : 0.01s ~ 1s 0.1s ~ 10s Selectable
ON Delay Output		Input : Hi → Lo Enable
OFF Delay Output		And Input : Hi → Lo Disable
ONE Shot Output		
AND Input		
AND Output		

Connection Diagram

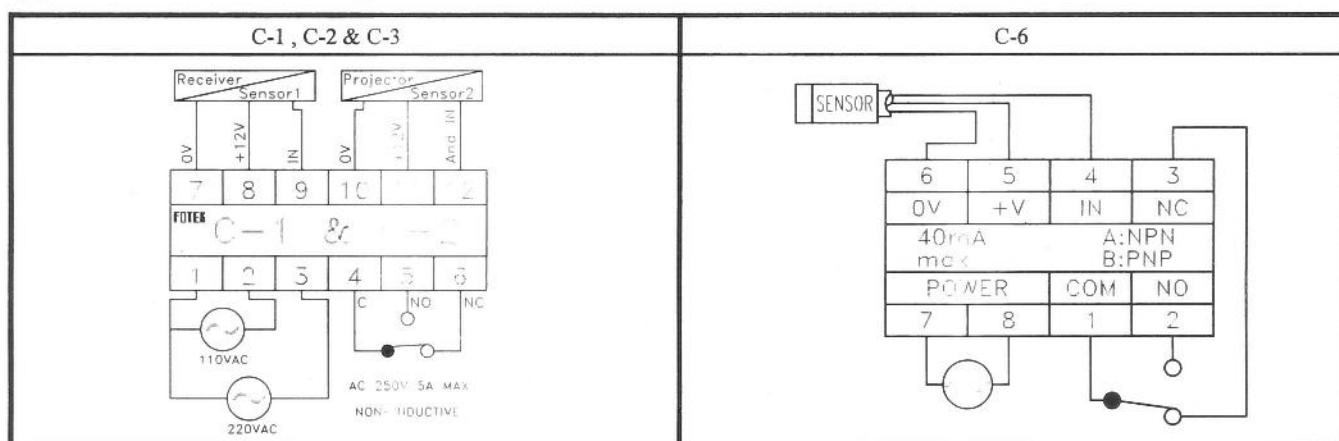

Dimension

